


LINE PANEL

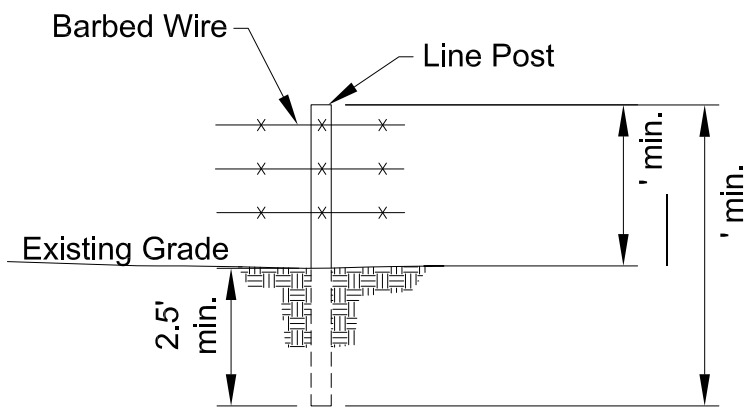

BARBED WIRE DETAIL

BARBED WIRE ASTM Class 3
galvanized, double strand.
Standard wire min. 12 1/2 gauge.
High-tensile wire min. 15 1/2 gauge.

Number of wires needed: _____

Spacing at _____
inches above the ground.

Line Posts (wooden): min. 4 in. diam. or 4 in. square.

Line Posts (steel): studded or punched T, U, or Y shaped, with anchor plates.
Min. weight 1.25 lbs./ft. (excluding anchor plate).

SPECIES AND TREATMENT FOR ALL WOOD: Use untreated durable posts of species such as red cedar, black locust, or white oak with bark removed, or non-durable wood that is preservative pressure treated (AWPA UC4A, Ground Contact, General Use). Do not use red pine.

SPECIAL INSTRUCTIONS:

Drawing not to scale. Standardized drawing must be adapted to the specific site.